



V1.1

--
--
--

KE-GT(80-110)KTL4







1		6
2		10
3		16
4		24
5		25
6		29
7		31
8		32

1

1.1

▪

▪

▪

▪

▪

▪

▪

▪

▪

▪

▪



-
-
-

1.2



1.3



[illegible]

2

2.1







2.2






2.3

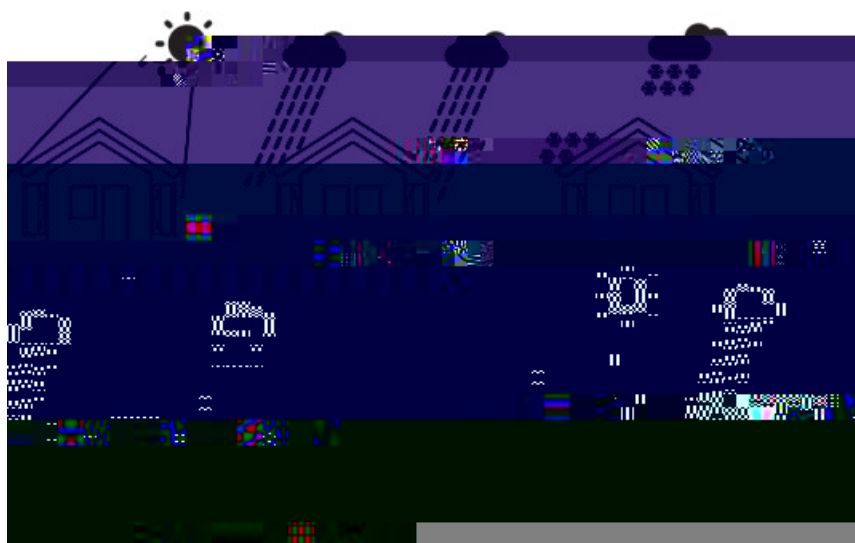

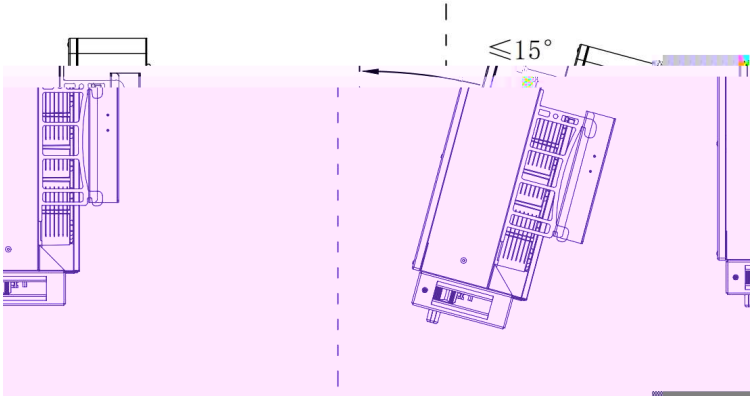





2.4

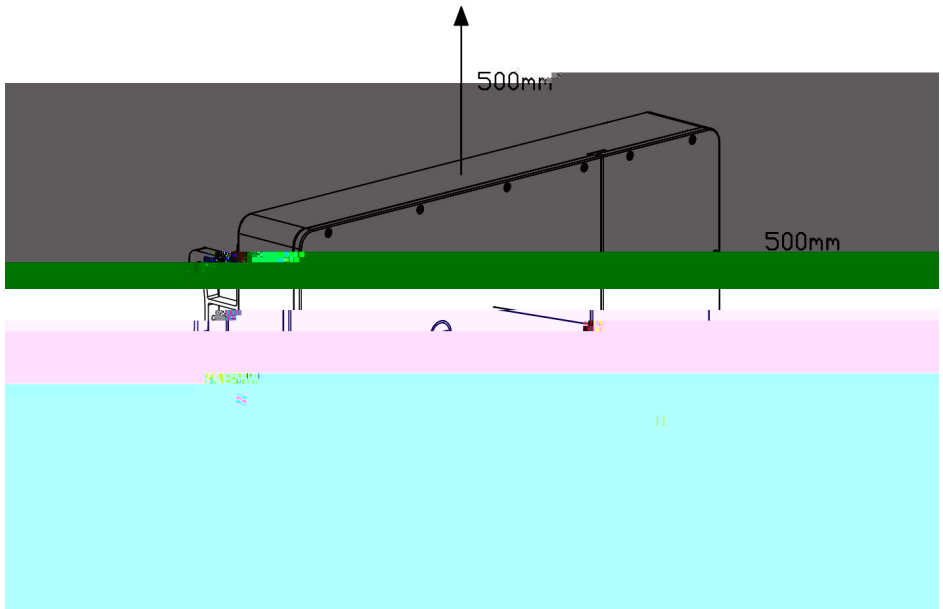

2.5



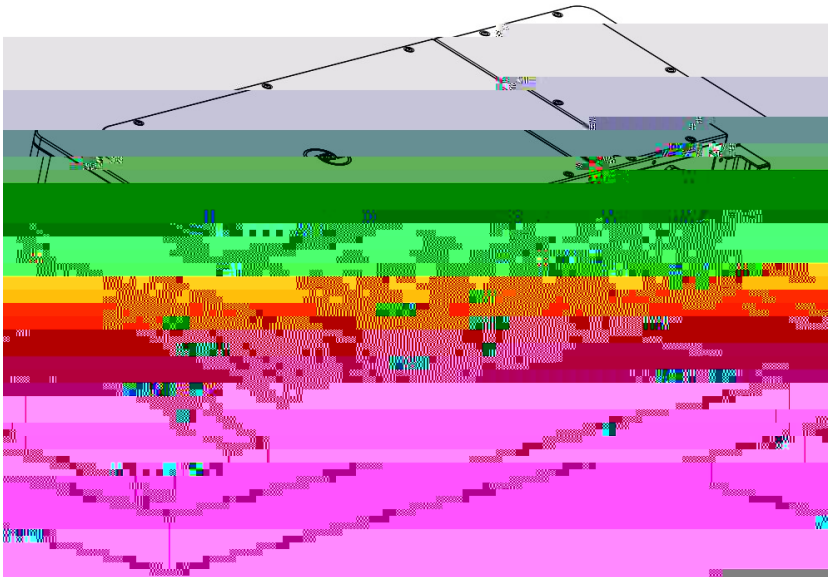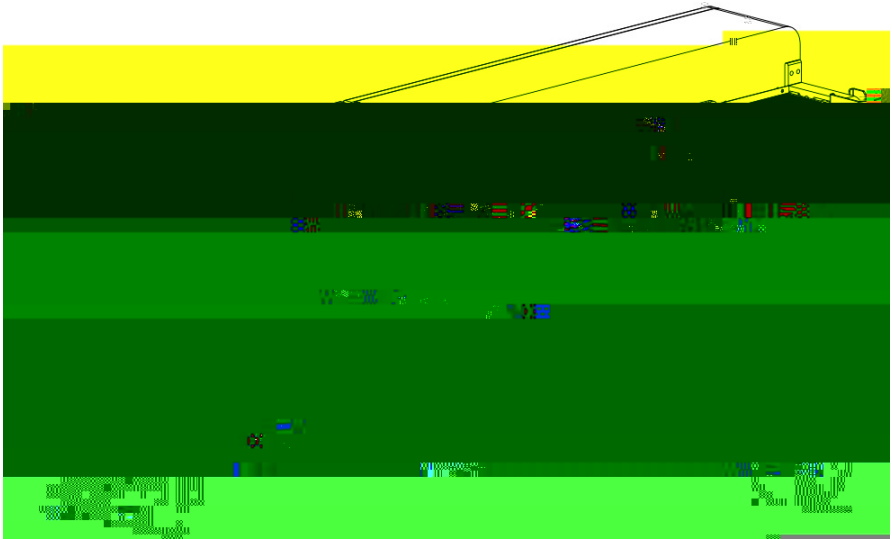



3



3.1


3.2





- ☞
- ☞
- ☞
- ☞
- ☞

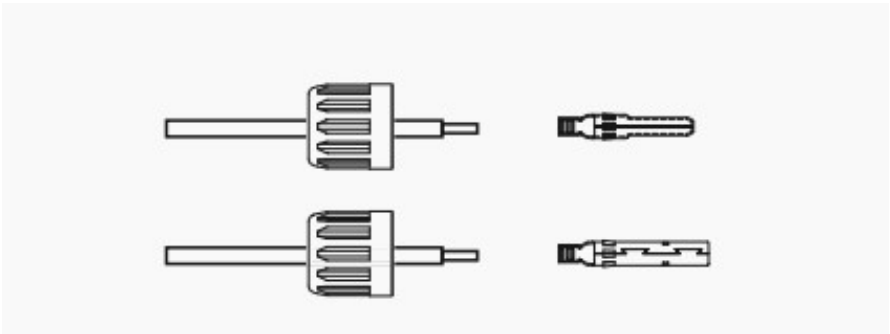
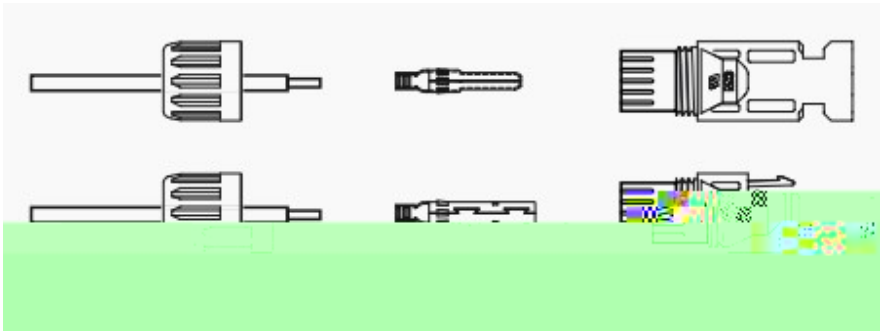


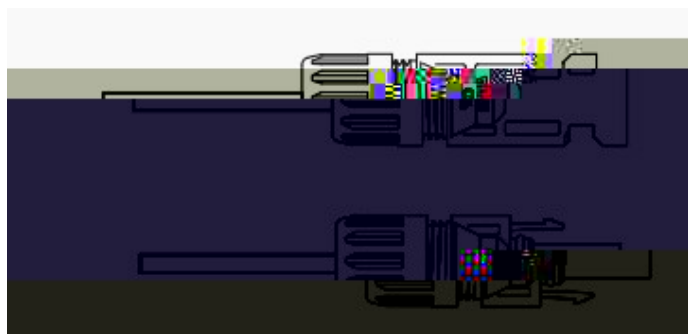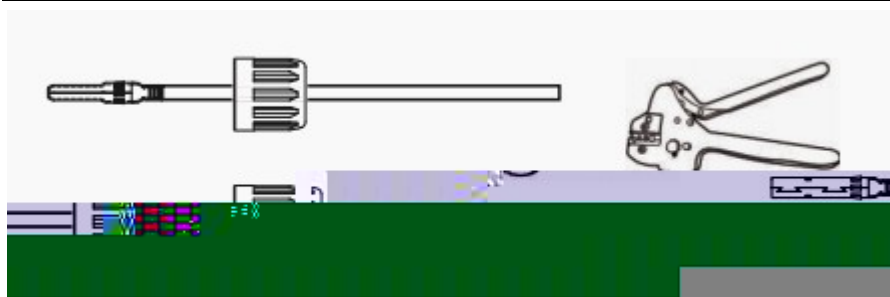

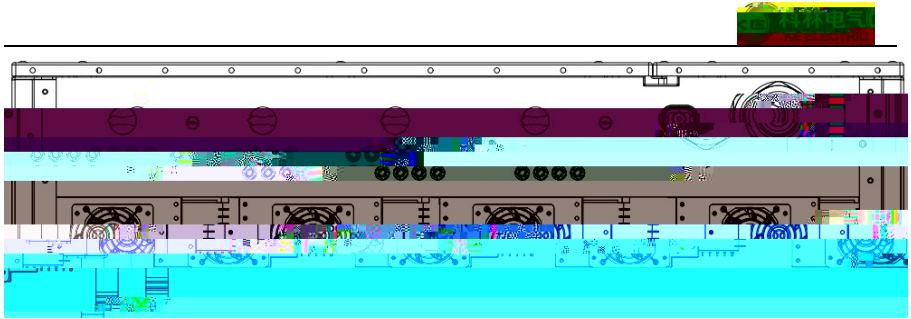

3.3

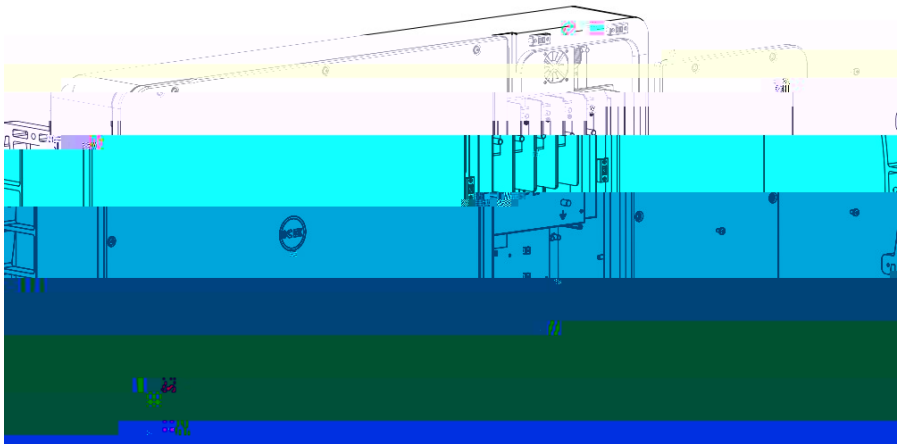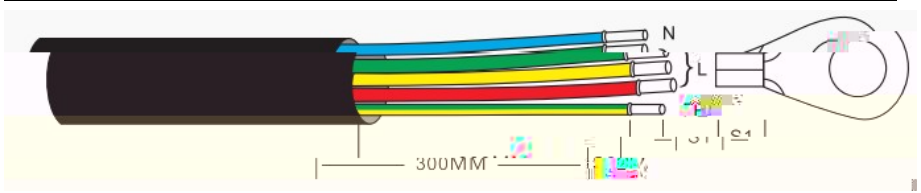

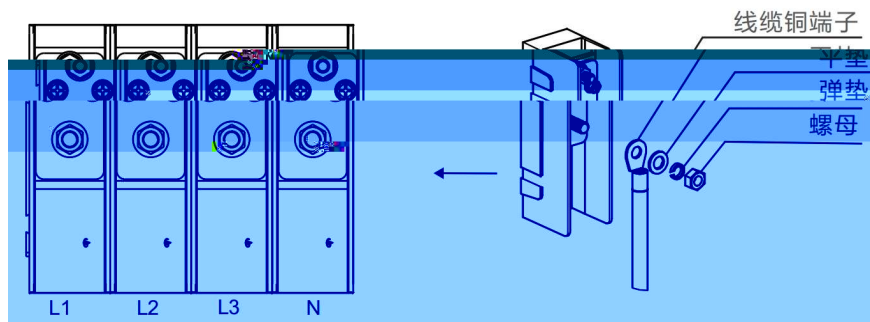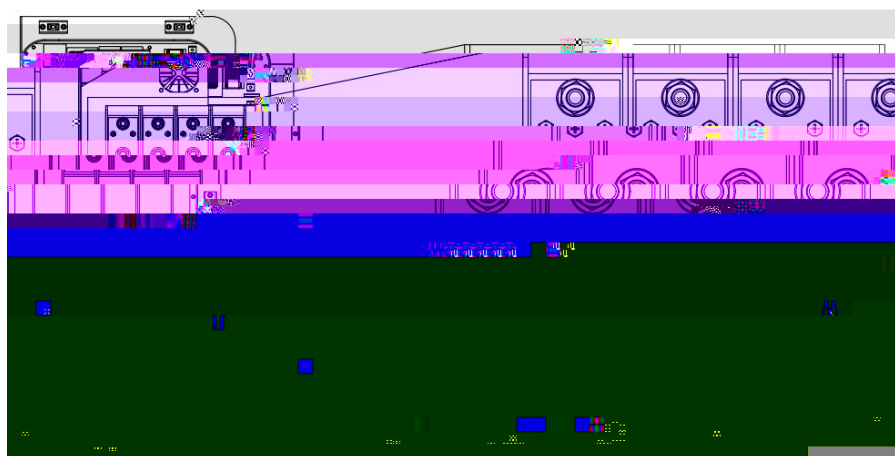


3.4




重要:

对于并联的多个逆变器，所有逆变器应连接到同一点接地，以确保接地线等电位连接。

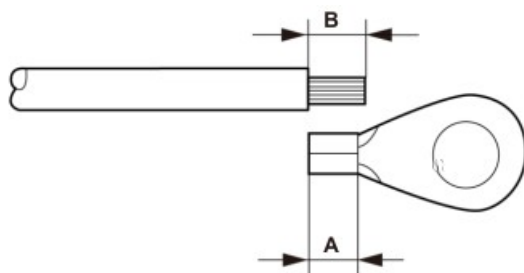

重要:


□ (B (绝缘剥离长度) 比A (OT线端子压接区域) 长2mm~3mm。

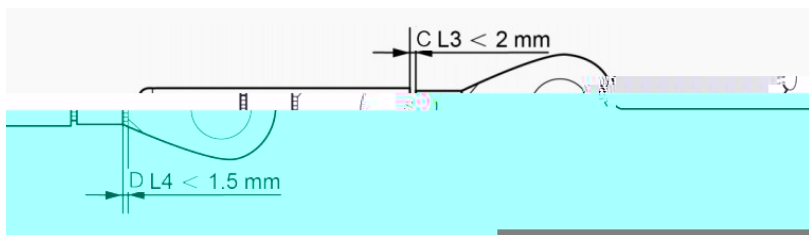



重要:

将端子压接到线缆后，检查连接以确保端子牢固地压接到线缆上。

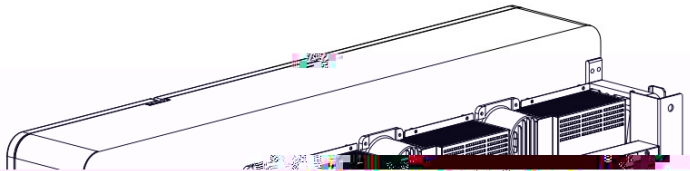

重要:

为保持性能，安装时

4


4.1


4.2

5

5.1





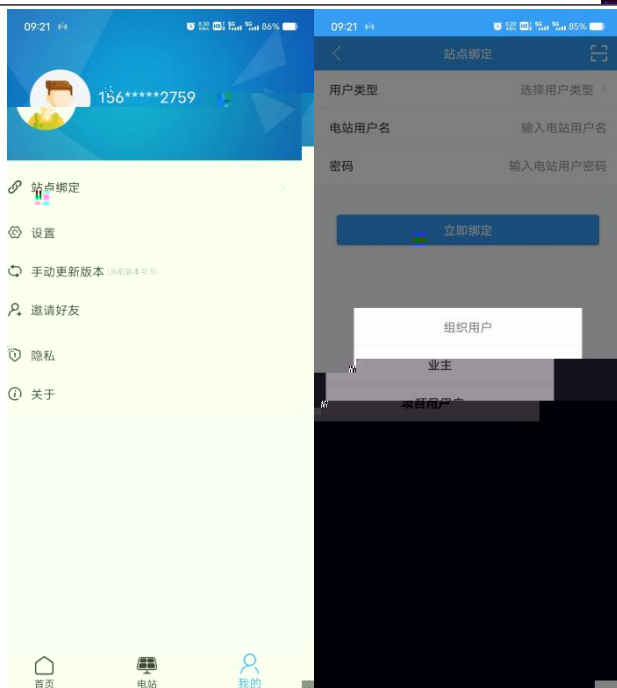

5.2



[illegible]

7



