


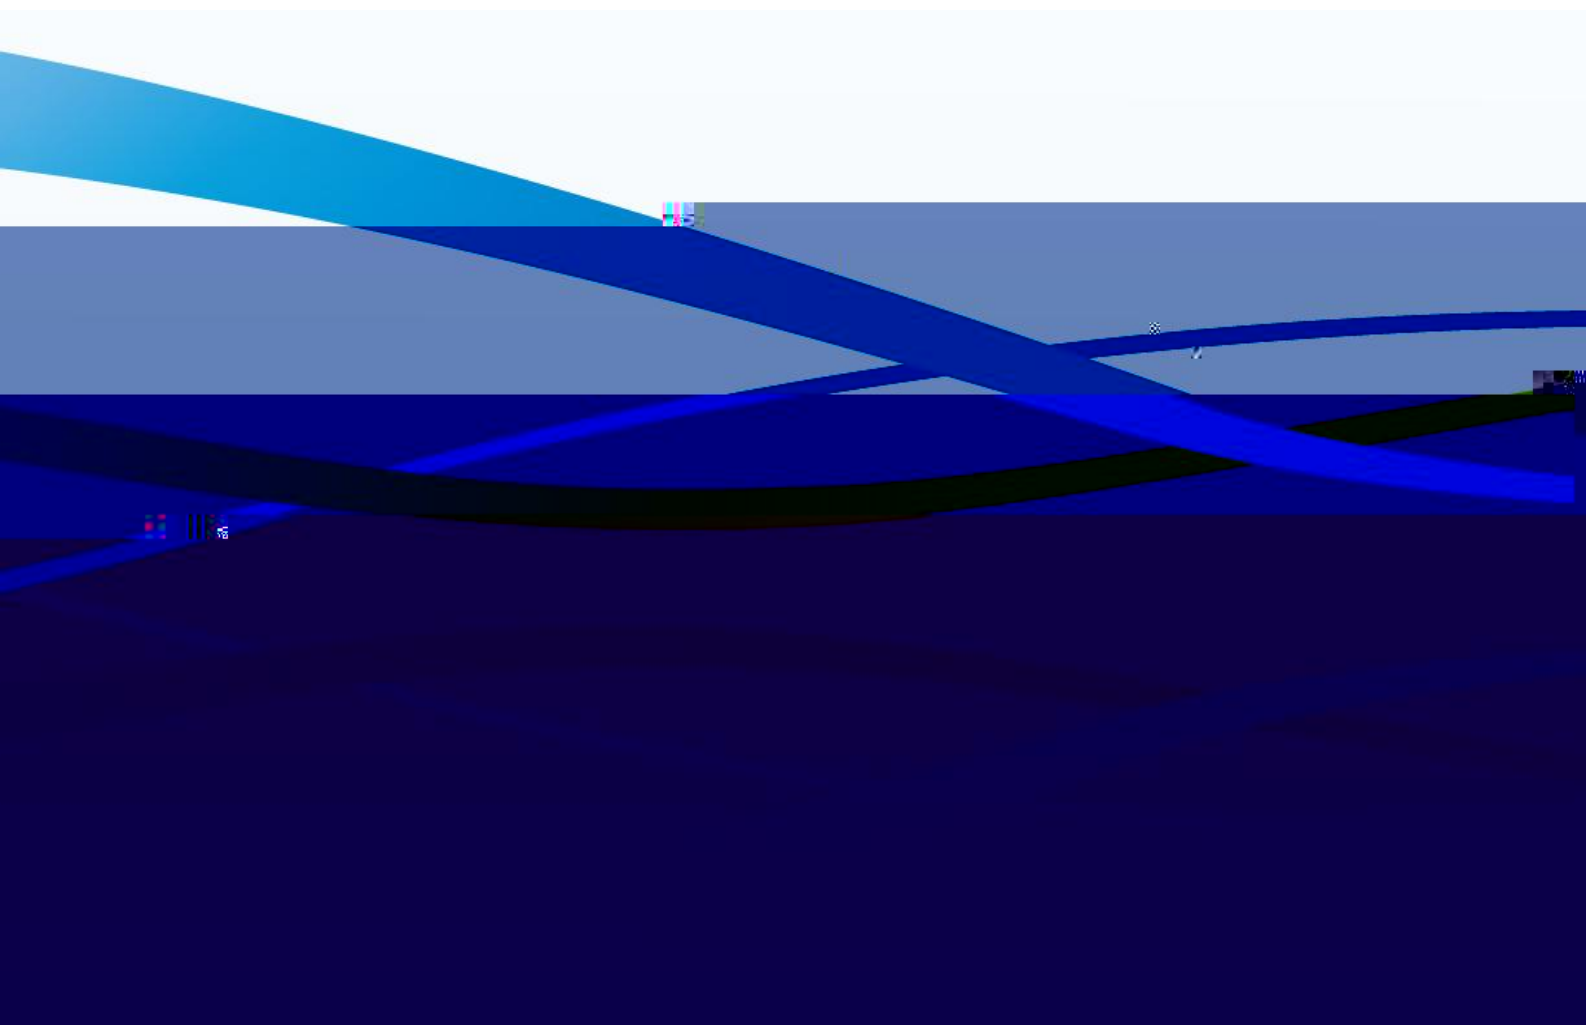

.....	1
4	1
4	2
4	4
4 4	6

4

10kV

10kV

4

4

4

10kV

Ш

4

4

RS232

RS485

Ш

GB/T 17215.322-2008

0.5S

GB/T 17215.323-2008

2

DL/T634.5101-2002

A-1

FTU	FTU
DTU	DTU

A

2.7.1

/
 4 LED
 80ms ¥ 16ms
 100k á

2.7.2 RS232/RS485

RS232/RS485
 RS232/RS485 1200bps 4 2400bps 4 4800bps 4
 9600bps 19200bps 9600bps

2.7.3

- 1) FTU
 - 24V
 - DC24V
 - DC18V~DC36V , 5%
 - FTU 2W
- 2) DTU
 - DC48V
 - DC18V~DC72V 5%
 - DTU 3W

4

3.1

4

4

Ш

4

4

4

4

4

Ш

Ш

3.2

0.01Ш

50

0 4



3 山
3.6

96 山

62 山

7 山

山 24 山

24

山

DL/T 634.5101 | 2002 o 山

4 4

FTU



§

§


4


4

W

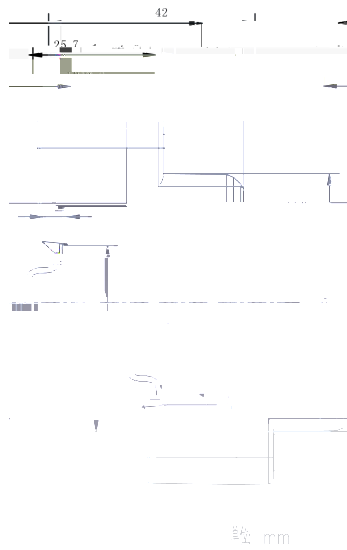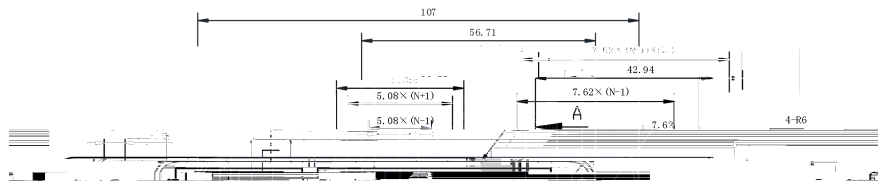


单位: mm

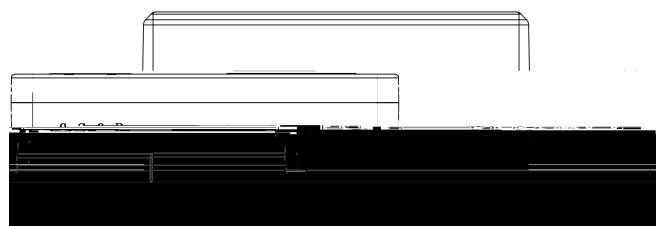

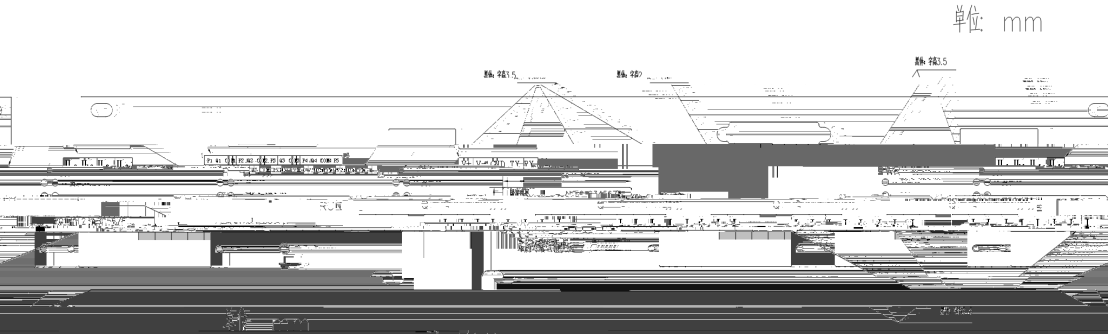

		4	46	48	2	4	DC24V 4RS232/RS485
	DB25						4 46 48
			4		4		
W							
		JP12			5.08		4
		5.08			5		DB25
		D-1W					
D-1					DTU		

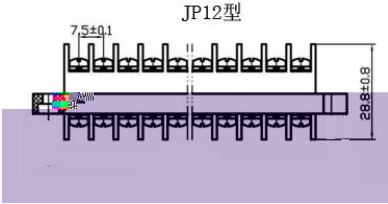1~ 2					
1	Ia1	1A	RVVP2.5m m		
2	Ib1	1B	RVVP2.5m m		
3	Ic1	1C	RVVP2.5m m		
4	In1	1	RVVP2.5m m		

5	Ia2	2A	RVVP2.5m m
6	Ib		

24	COM8	8	RVVP0.2m m		
25	S		RVVP0.2m m		